

GO2+ Case

Instructions

Portable Charging Case



Content list

What's inside the box?

- 1 x GO2+ Case
- 1 x PDU power strip
- 1 x divider pack
- 1 x high tension retractable spring security combination cable lock
- 2 x combination padlocks

Instructions

Set Up Instructions

1. Remove all exterior packaging and recycle waste where possible.
2. Open main device storage compartment and set dividers into place according to the devices that will be stored inside the case (see Fig. 1).
3. Place devices into each compartment, ensure that the device power inlet is towards the top of the case to allow access for the charging cable.
4. Open the front zipped AC compartment and place charging cables into stretchy cable pockets (2 cable per pocket).
5. Pull AC mains plugs down through the open base of the pockets and plug into the power strip. Fix the Velcro tab into place to secure the excess cables into the base of the pocket.
6. Feed the device cable through the cable port at the top of the stretchy pocket, into the main storage compartment and plug into the device (see Fig. 2).
7. Close AC compartment and main device storage compartments. For additional security we recommend the use of a padlock on both the main device storage compartment and the AC compartment.

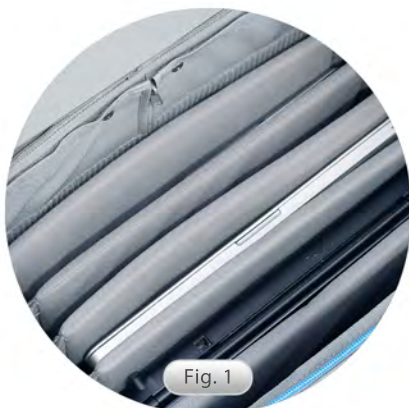


Fig. 1



Fig. 2

Charging Instructions

1. Remove Go2 mains power cord from left hand storage pocket in full.
2. Plug cable into standard wall outlet to begin charging. Prevent trip hazard by ensuring mains cable and Go2 case are not placed across walkways.
3. After charging, unplug mains power cable from wall and return cable to the left hand storage pocket in full.

*** To prevent trip hazards or damage to the mains cable, always wind cable up and store it in GO² CASE cable storage pocket during movement or when not in use.**

Storing Mains Cable

1. To store the mains cable, wind the cable up and place in the left hand side lower pocket (see Fig. 3) and secure with velcro. Alternatively, store the looped mains cable in the left hand side top pocket, securing and tidying the excess cable with the cable flap.



Fig. 3

Transporting Instructions

1. Securely fasten Velcro pockets and zip up lid and front panel, connect front straps.
2. Press the button in top of the extendable handle and pull up until it fully engages.
3. Tip the unit onto its wheels and pull the GO2+ Case behind you using the retractable handle.
4. To close the retractable handle, push the button down whilst pushing down on the handle at the same time until it fully engages.
5. To lift the unit, use the handle on the top. distribute the weight evenly.

Locking Instructions

1. Find a suitable location to secure the Go2 case to, for example the leg of a heavy desk.
2. Take the looped end of the locking cable and wrap it around the securing point and feed lock through the looped end of the cable as shown (see Fig. 4)
3. Insert the locking device into the Go2 case lock slot located on the right hand side of the bag.
4. To lock, turn the number dials to conceal your lock combination.
5. To unlock, turn the number dials so the correct combination aligns with combination notching line, press do button to open.



Fig. 4

How to set the combination of the combination padlock?

The preset combination is 0-0-0-0. To set your own combination, please proceed as follows:

1. Set up the dials at 0-0-0-0. Then release the shackle.
2. Turn the shackle 90°. Then press it down, while setting your own new combination.
3. Turn the shackle back to its first position. The new padlock combination is settled.

How to set the combination of the combination cable lock?



1. The pre-set factory combination is 0-0-0-0, turn number dials so the correct combination aligns with combination notching line, press button to open.
2. Press reset button with a small tool, do not release until the new combination is set.
3. Set new 4 digit combination by turning the number dials to align with combination notching line. Release reset button.

***When setting a new combination, ensure reset button is pressed down until new combination has been reset, releasing reset button too early may result in an incorrect code being set.**

General Safety Precautions

The Go2+ Case should be situated close to a power socket that is easily accessible. Cabling between the wall and the unit could be a trip hazard.

Always ensure that all the pockets are fully closed and zipped up and that the mains power lead is disconnected and stored in the cable pocket before moving the Go2+ Case.

The unit is designed for storage and charging purposes only. This unit is specifically designed for use with laptops and their factory supplied AC adaptors or USB cables, use for recharging or powering any other equipment will invalidate the warranty.

Always disconnect the GO2+ Case mains power lead from the wall outlet before altering the AC adaptor configuration. When the GO2+ Case is unplugged from the mains wall socket outlet you should ensure the outlet is switched off if possible.

To avoid risk of electric shock or fire the unit should only be used by a competent adult. This appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

The mains power lead must not be pulled when the GO2+ Case is under power as this could damage critical components. Inspect the plug and power lead daily, if the plug and power lead is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons to avoid a hazard.

The GO2+ Case is intended for indoor use only and should be used in a dry environment and at normal room temperatures. No water or moisture must be allowed into the power strip. Movement across rough surfaces should be avoided and doing so will void the warranty claims for damage to the wheels. When moving your GO2+ Case between floors it is strongly recommended that the unit is transported via a lift or ramp. Do not wheel the GO2+ Case up or down stairs as this will cause damage to the wheels.

Before any cleaning of the GO2+ case it should be switched off and the IEC mains lead must be removed from the mains wall socket. Cleaning of the unit should only be done with a dry cloth; no liquid detergents or aerosol cleaners are to be used on the power strip as these could damage internal components.



DANGER!
RISK OF ELECTRIC SHOCK
DANGER! ELECTRICAL CORDS
CAN BE HAZARDOUS
MISUSE CAN RESULT IN FIRE
OR DEATH BY ELECTRIC SHOCK

Technical Data Sheet

Nature of supply:

Rated mains supply voltage: **UK: 220-240V**

Aus: 230V

Euro: 230V

Rated frequency: **UK: 50Hz**

Aus: 50Hz

Euro: 50Hz

Max. current: **Our power strips are rated to 13A.**

Total cumulative Watts requirement of devices in each unit should not exceed 2880W.

Type of power connection:

UK: Detachable mains power lead with UK 3 pin plug and C19 Connector

Aus: Detachable mains power lead with Australian 3 pin plug and C13 Connector (AS/NZS 3112:2004)

Euro: Detachable mains power lead with Schuko type plug and C13 Connector

Operating Temperature:

We recommend an operating temperature of 5°C - 33°C (41°F-91°F).

Cooling condition: Natural Convection through vents.

Correct disposal of this product:



This marking indicates that this product should not be disposed with other household wastes throughout the EU, US and Australia. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmentally safe recycling.

EQUIPMENT MUST BE SUPPLIED FROM EARTHED / GROUNDED SUPPLY

High Touch current can result from the summation of the touch currents of each of the devices plugged into the unit.

To protect against a hazard the connection to protective earth should be reliable

The equipment supply connection (mains plug, mains cable and inlet) must be annually inspected / checked for signs defects or excessive wear and replaced where necessary.

